
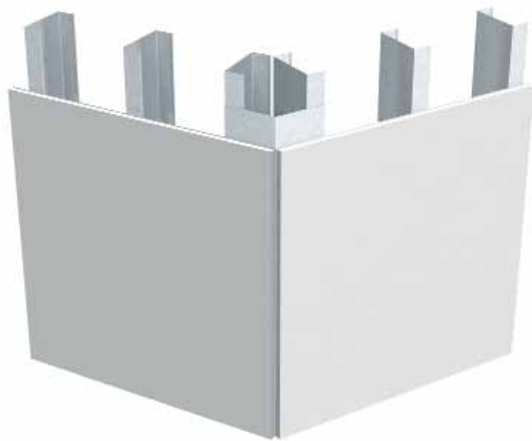


Utility angles used to connect, reinforce or secure metal stud framing in various drywall applications.

- Available in numerous sizes and gauges
- Custom sizes, bends and lengths available

Corner angle is a multipurpose 90° or 120°/135° galvanized angle used in dozens of framing applications. Some of the most common applications include lapped framing conditions, soffit framing, floor and ceiling runner, chase wall construction and laminated gypsum drywall partitions.

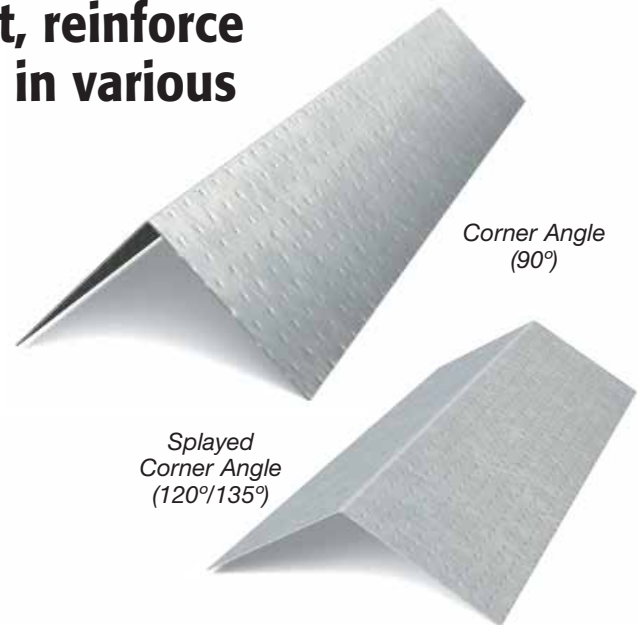

Corner Angle (CA-Series™), Corner Angle (HCN) and 120°/135° (CAEW)

DMF Product Code	Thickness		Design Thickness		Size		Length		Weight		Packaging
	Gauge	Mils	Inches	mm	Inches	mm	ft	m	lbs/ft	kg/m	Pcs/Skid
					5/8 x 2	15.9 x 50.8			0.150	0.223	500
					7/8 x 1-3/8	22.2 x 34.9			0.160	0.236	500
CAN 90°	25	18	0.0188	0.478	1-1/2 x 1-1/2	38.1 x 38.1	10	3.05	0.170	0.252	500
					2 x 2	50.8 x 50.8			0.290	0.430	500
					3 x 3	76.2 x 76.2			0.430	0.640	500
CANW 135°	25	18	0.0188	0.478	1-1/2 x 1-1/2	38.1 x 38.1	10	3.05	0.170	0.252	500
					2 x 2	50.8 x 50.8			0.250	0.371	500
HCN (Hemmed) 90°	25	18	0.0188	0.478	2 x 2	50.8 x 50.8	10	3.05	0.270	0.400	500
					5/8" x 2	15.9 x 50.8			0.300	0.446	500
					7/8 x 1-3/8	22.2 x 34.9			0.260	0.387	500
CAE 90°	20	30	0.0312	0.792	1-1/2 x 1-1/2	38.1 x 38.1	10	3.05	0.330	0.489	500
					2 x 2	50.8 x 50.8			0.450	0.669	500
					3 x 3	76.2 x 76.2			0.680	1.010	500
CAEW 135°	20	30	0.0312	0.792	1-1/2 x 1-1/2	38.1 x 38.1	10	3.05	0.370	0.548	500
					2 x 2	50.8 x 50.8			0.500	0.741	500

Packaging may vary by region.

Corner Angle (CA-Series™) Corner Angle (HCN) and 120°/135° (CAEW)