
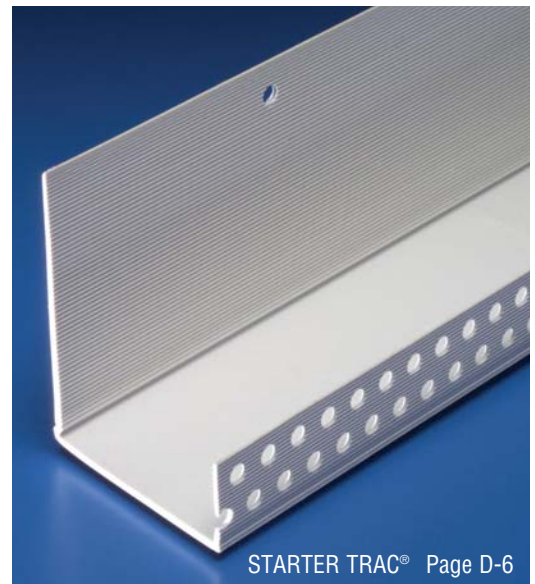
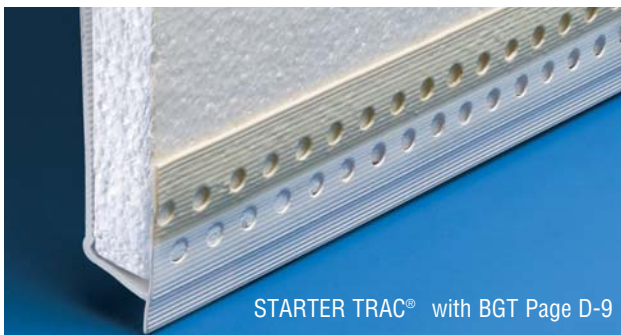


Exterior Insulated Finishes

Section: 07240

Generic EIFS System Detail

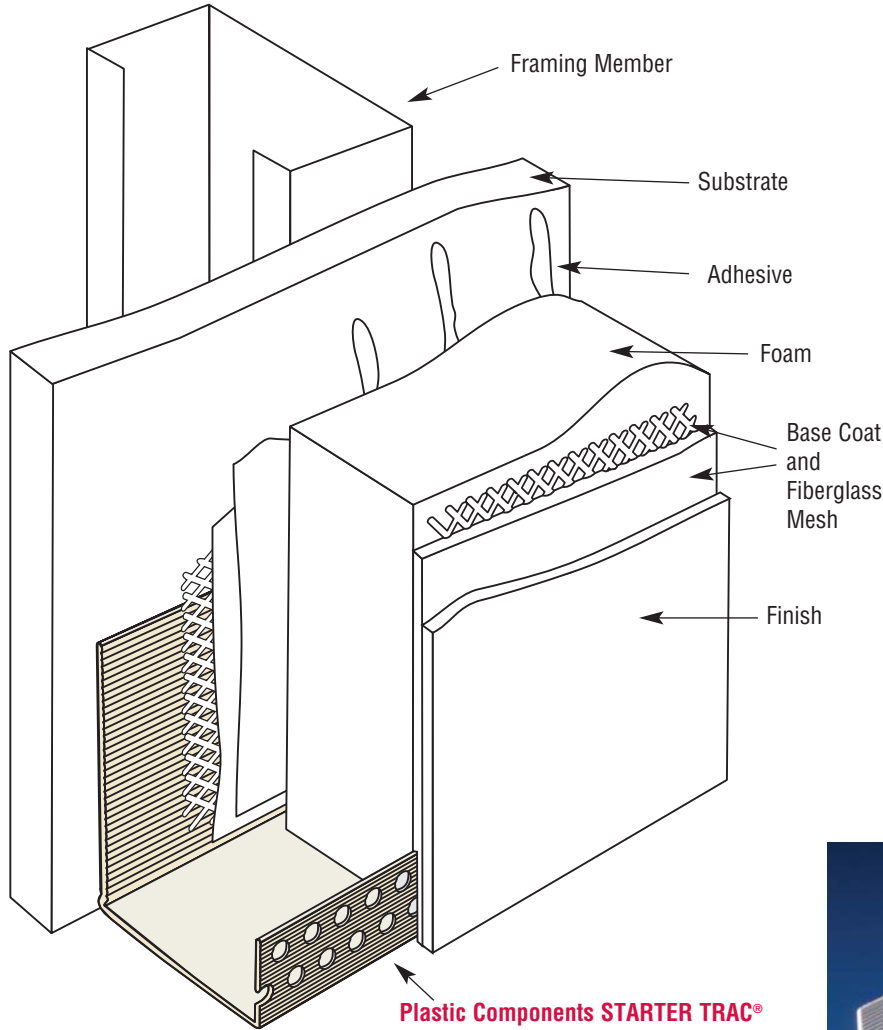

PLASTIC PC™
COMPONENTS inc.



Exterior Insulated Finishes

Section: 07240

Corner Bead

Product Number	Product Size	Pieces Per Box
4	2-1/2" x 2-1/2" flange (64 mm x 64 mm)	50


8' & 10' (2.5 & 3 m) Lengths

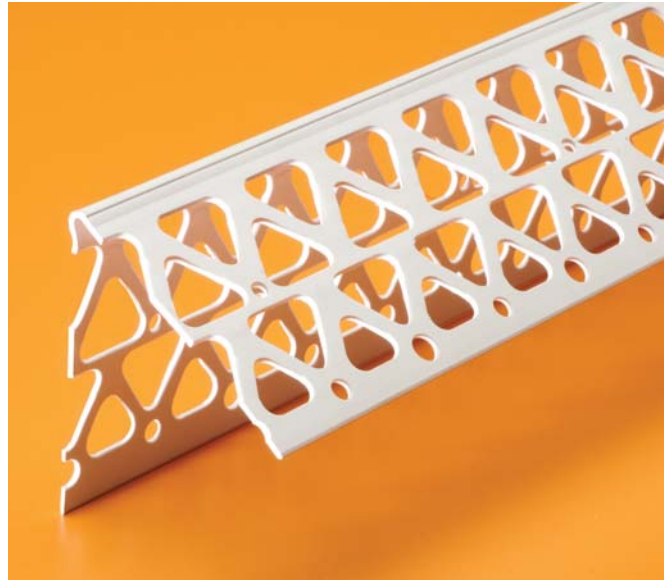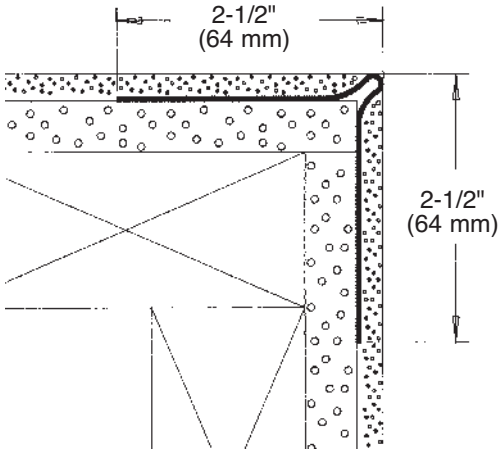

Corner Bead

Product Number	Dimension/Description	Pieces Per Box
2209	1-5/8" x 1-5/8" (41 mm x 41 mm) wide grooved flanges with large holes.	100
2209XL	1-3/4" x 1-3/4" (44 mm x 44 mm) jumbo corner bead.	100

10' (3 m) Lengths

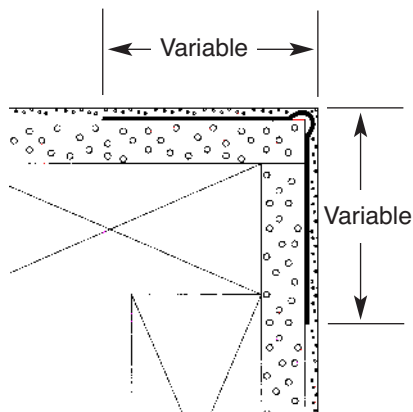

**NEW
Larger
Holes!**



Note: Striations on exposed flanges.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



PLASTIC PC™
COMPONENTS inc.

800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com


Exterior Insulated Finishes

Section: 07240


Arch Corner Bead

NEW Design

Product Number	Dimension/Description	Pieces Per Box
2209A	Corner bead, 1-5/8" (41 mm) pre-slotted flange. 10' (3 m) Lengths	100

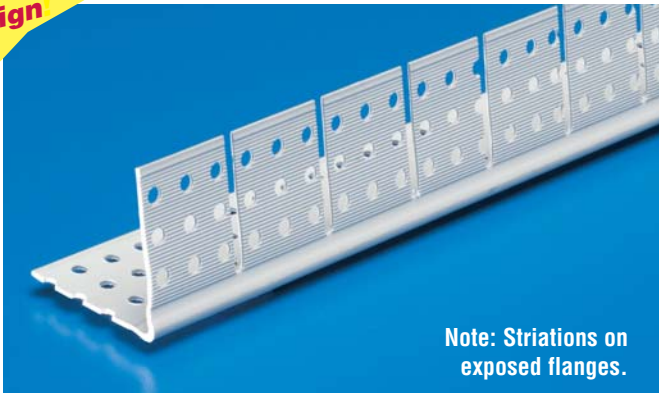

Note: Striations on exposed flanges.

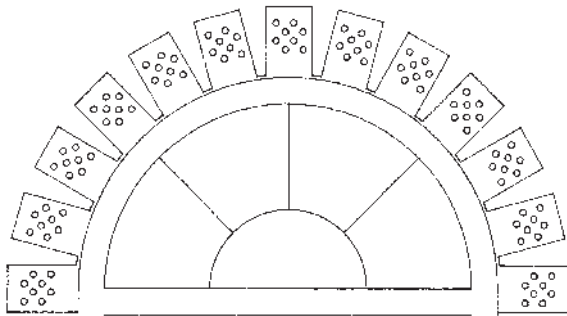

PLASTIC PCTM
COMPONENTS inc.

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.


800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com

Exterior Insulated Finishes

Section: 07240

CB EIFS Casing Bead

Product Number	*Dimension A	Pieces Per Box
CB-50-16	1/2" (13 mm)	60
CB-58-16	5/8" (16 mm)	60
CB-75-16	3/4" (19 mm)	40
CB-1-16	1" (25 mm)	40
CB-15-16	1-1/2" (38 mm)	40
CB-2-16	2" (51 mm)	30

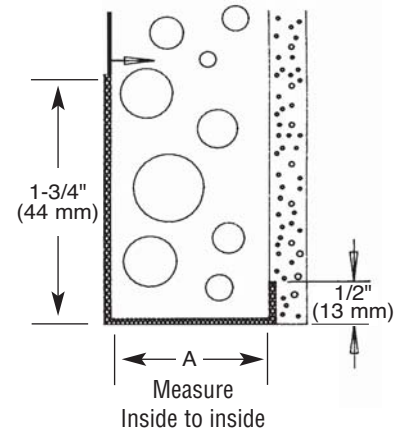



Add suffix "WP" to order with weep holes.
 Example: CBWP-15-16 – 10' (3 m) Lengths
 *Dimension "A" – measure inside to inside

i DRIP TRAC®

Product Number	*Dimension A	Pieces Per Box
iDT-50	1/2" (13 mm)	35
iDT-58	5/8" (16 mm)	35
iDT-75	3/4" (19 mm)	30
iDT-1	1" (25 mm)	25
iDT-125	1-1/4" (31 mm)	20
iDT-15	1-1/2" (34 mm)	20
iDT-175	1-3/4" (38 mm)	15
iDT-2	2" (51 mm)	15
iDT-225	2-1/4" (57 mm)	15
iDT-25	2-1/2" (64 mm)	15
iDT-275	2-3/4" (70 mm)	10
iDT-3	3" (76 mm)	10
iDT-35	3-1/2" (89 mm)	10
iDT-4	4" (102 mm)	10

10' (3 m) Lengths

*Dimension "A" – measure inside to inside

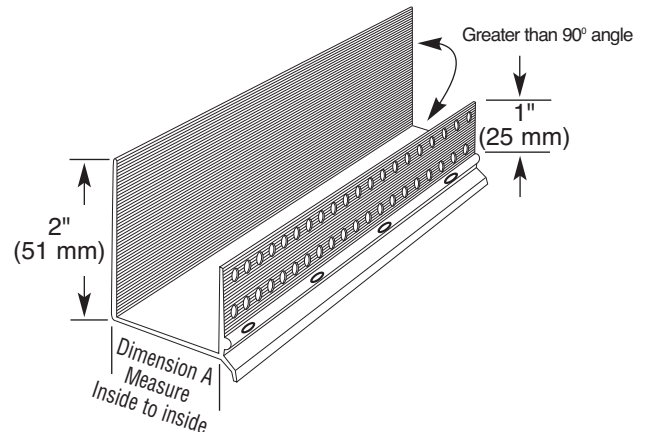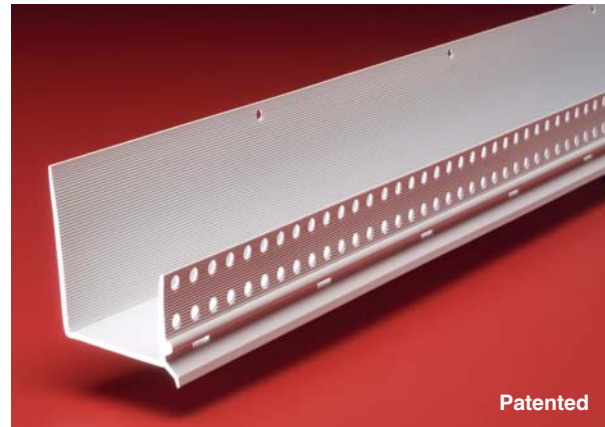

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Exterior Insulated Finishes



Section: 07240

Extreme Moisture STARTER TRAC®

Product Number	Description/Dimension A STARTER TRAC® w/ 3" (76 mm) back flange	Pieces Per Box
SB-EMT75	3/4" (19 mm)	30
SB-EMT1	1" (25 mm)	30
SB-EMT15	1-1/2" (38 mm)	30
SB-EMT2	2" (51 mm)	30

10' (3 m) Lengths

To order with weep slots, add WS to Catalog number i.e. SB-EMT1WS
Also available in Tan and Gray, contact Customer Service at (800) 327-7077 for more information.

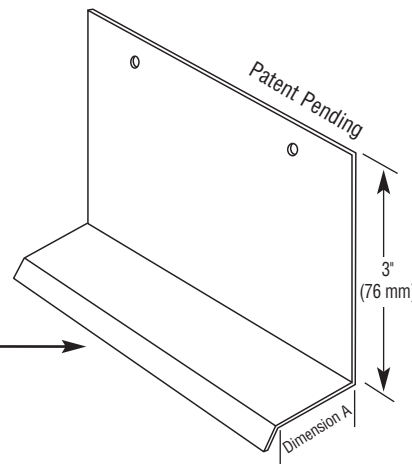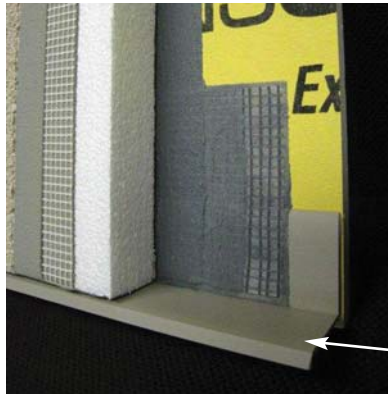


NEW!

End Caps for SB-EMT Series

Product Number	Description/Dimensions Back Flange Bottom Flange	Sets Per Box
WDEC3-1	3" (76 mm) 1" (25 mm)	25
WDEC3-15	3" (76 mm) 1-1/2" (38 mm)	25
WDEC3-2	3" (76 mm) 2" (51 mm)	25

Patented

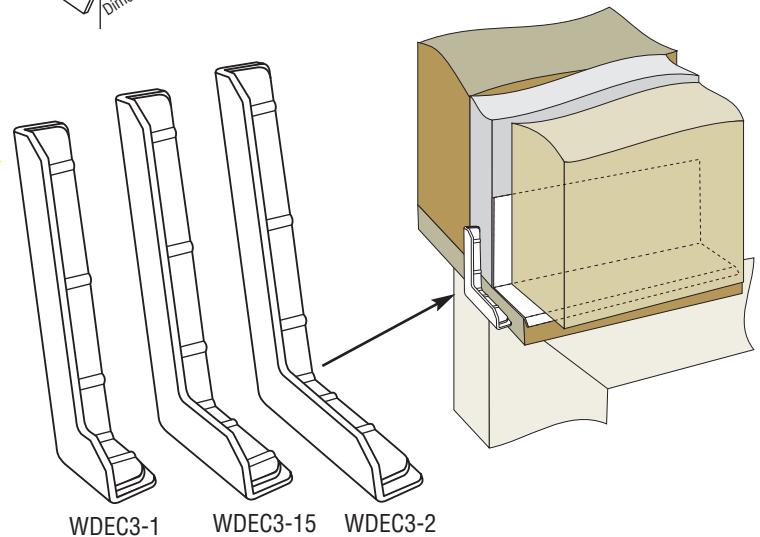

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com


Exterior Insulated Finishes

Section: 07240


STARTER TRAC®

Product Number	Dimension A	Pieces Per Box
ST-50	1/2" (13 mm)	35
ST-58	5/8" (16 mm)	35
ST-75	3/4" (19 mm)	30
ST-78	7/8" (22 mm)	30
ST-1	1" (25 mm)	25
ST-125	1-1/4" (32 mm)	20
ST-15	1-1/2" (38 mm)	20
ST-158	1-5/8" (41 mm)	15
ST-175	1-3/4" (44 mm)	15
ST-2	2" (51 mm)	15
ST-225	2-1/4" (57 mm)	15
ST-25	2-1/2" (64 mm)	15
ST-275	2-3/4" (70 mm)	10
ST-3	3" (76 mm)	10
ST-35	3-1/2" (89 mm)	10
ST-4	4" (102 mm)	10

10' (3 m) Lengths

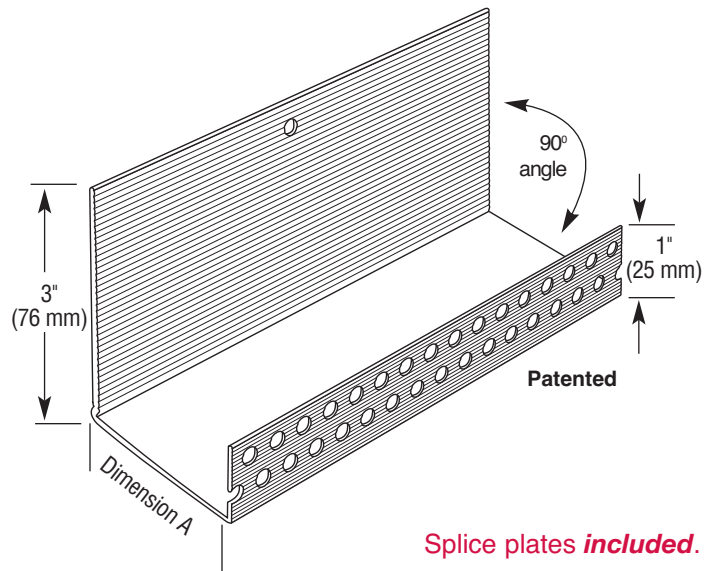

Splice plates *included*.

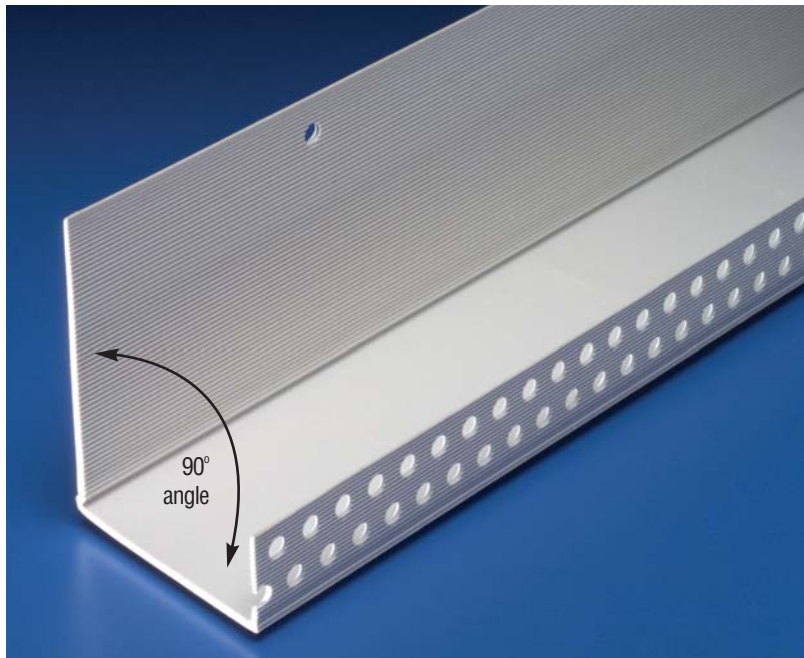




Exterior Insulated Finishes

Section: 07240

STARTER TRAC® with Weep Holes

Product Number	Dimension A	Pieces Per Box
STWP-50	1/2" (13 mm)	35
STWP-58	5/8" (16 mm)	35
STWP-75	3/4" (19 mm)	30
STWP-78	7/8" (22 mm)	30
STWP-1	1" (25 mm)	25
STWP-125	1-1/4" (32 mm)	20
STWP-15	1-1/2" (38 mm)	20
STWP-158	1-5/8" (41 mm)	15
STWP-175	1-3/4" (44 mm)	15
STWP-2	2" (51 mm)	15
STWP-225	2-1/4" (57 mm)	15
STWP-25	2-1/2" (64 mm)	15
STWP-275	2-3/4" (70 mm)	10
STWP-3	3" (76 mm)	10
STWP-35	3-1/2" (89 mm)	10
STWP-4	4" (102 mm)	10

10' (3 m) Lengths

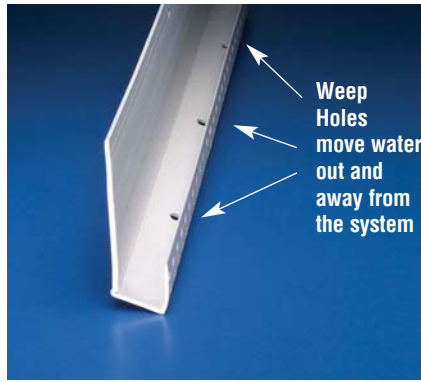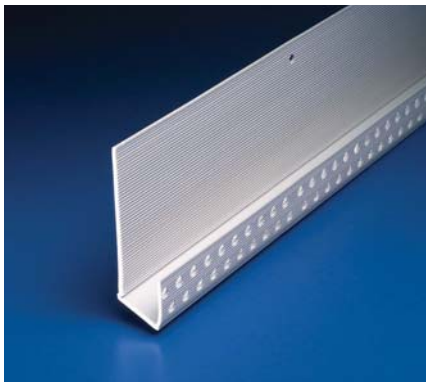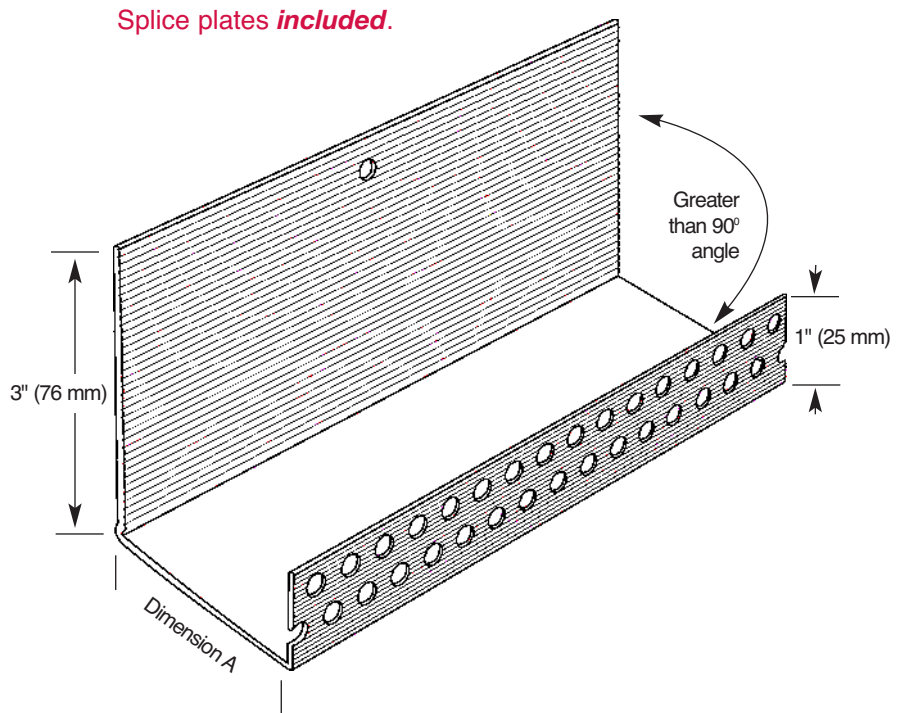

PLASTIC PC™
COMPONENTS inc.

D-7

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com

Exterior Insulated Finishes


Section: 07240

STARTER TRAC® Drip Edge

Product Number	Dimension A	Pieces Per Box
STDE-50	1/2" (13 mm)	35
STDE-58	5/8" (16 mm)	35
STDE-75	3/4" (19 mm)	30
STDE-78	7/8" (22 mm)	30
STDE-1	1" (25 mm)	25
STDE-125	1-1/4" (32 mm)	20
STDE-15	1-1/2" (38 mm)	20
STDE-175	1-3/4" (44 mm)	15
STDE-2	2" (51 mm)	15
STDE-225	2-1/4" (57 mm)	15
STDE-25	2-1/2" (64 mm)	15
STDE-275	2-3/4" (70 mm)	10
STDE-3	3" (76 mm)	10
STDE-35	3-1/2" (89 mm)	10
STDE-4	4" (102 mm)	10

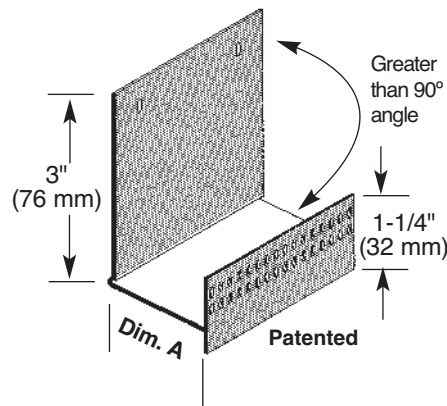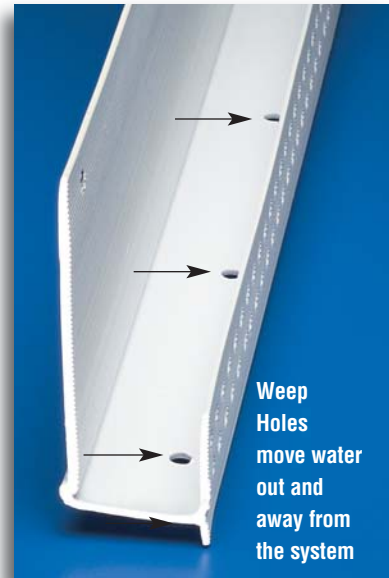

Splice plates *included*.



Weep Holes
3" (76 mm) O.C.


The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Exterior Insulated Finishes

Section: 07240

STARTER TRAC® with BGT “Board Grip Technology” Patent Pending

Product Number	Dimension A/Description STARTER TRAC® with drip edge for:	Pieces Per Box
STDE-50 BGT	1/2" (13 mm) Board with BGT	35
STDE-58 BGT	5/8" (16 mm) Board with BGT	35
STDE-1 BGT	1" (25 mm) Foam with BGT	25
STDE-15 BGT	1-1/2" (38 mm) Foam with BGT	20

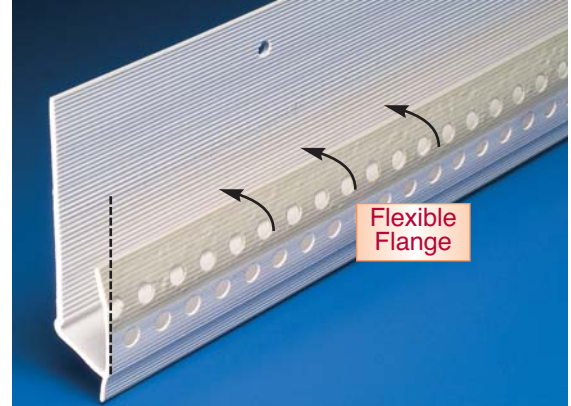


Splice plates *included*.



CB EIFS Casing Bead with Drip Edge/STARTER TRAC®

Product Name	*Dimension A	Pieces Per Box
CB-50-16L	1/2" (13 mm)	60
CB-58-16L	5/8" (16 mm)	40
CB-75-16L	3/4" (19mm)	40
CB-1-16L	1" (25 mm)	40
CB-125-16L	1-1/4" (32 mm)	35
CB-15-16L	1-1/2" (38 mm)	35
CB-2-16L	2" (51 mm)	30

NEW!

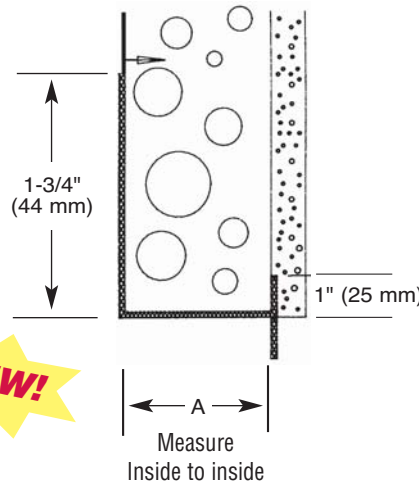

Add suffix "WP" to order with weep holes.
Example: CBWP-15-16L- 10' (3 m) Lengths
*Dimension "A"- measure inside to inside

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com

Exterior Insulated Finishes



Section: 07240

Hard Coat EIFS Casing Bead/STARTER TRAC®

Product Number	Dimension A	Dimension B	Pieces Per Box
CB-50-25	1/2" (13 mm)	1/4" (6 mm)	60
CB-75-25	3/4" (19 mm)	1/4" (6 mm)	60
CB-1-25	1" (25 mm)	1/4" (6 mm)	50
CB-15-25	1-1/2" (38 mm)	1/4" (6 mm)	40
CB-2-25	2" (51 mm)	1/4" (6 mm)	40

10' (3 m) Lengths

Add suffix "WP" to order with weep holes.
Example: CBWP-1-25

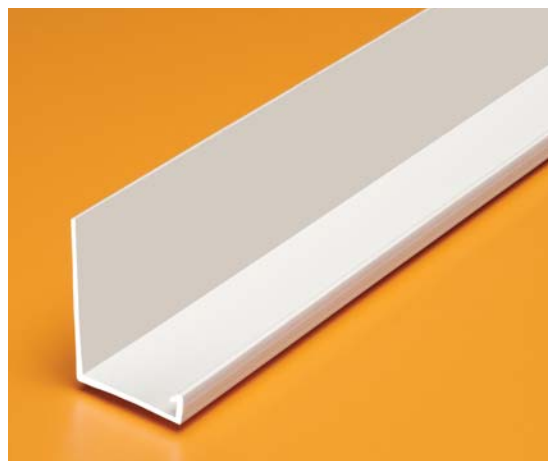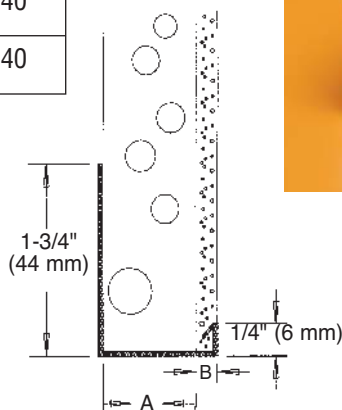


Hard Coat EIFS Casing Bead/STARTER TRAC®

Product Number	Dimension A	Dimension B	Pieces Per Box
CB-75-38	3/4" (19 mm)	3/8" (10 mm)	50
CB-1-38	1" (25 mm)	3/8" (10 mm)	50
CB-15-38	1-1/2" (38 mm)	3/8" (10 mm)	40
CB-2-38	2" (51 mm)	3/8" (10 mm)	40

10' (3 m) Lengths

Add suffix "WP" to order with weep holes.
Example: CBWP-1-38

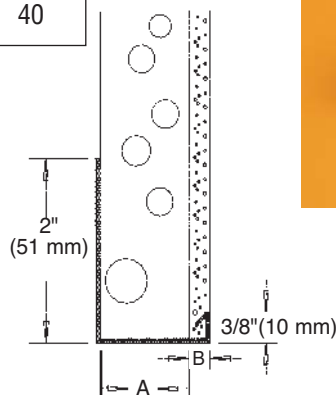

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.


Exterior Insulated Finishes

Section: 07240

Two-Piece Hard Coat EIFS Casing Bead/STARTER TRAC®

Product Number	Dimension A	Dimension B	Pieces Per Box
SC-1-25	1" (25 mm)	1/4" (6 mm)	50
SC-1-38	1" (25 mm)	3/8" (10 mm)	50
SC-1-50	1" (25 mm)	1/2" (13 mm)	50
SC-15-25	1-1/2" (38 mm)	1/4" (6 mm)	40
SC-15-38	1-1/2" (38 mm)	3/8" (10 mm)	40
SC-15-50	1-1/2" (38 mm)	1/2" (13 mm)	40
SC-2-25	2" (51 mm)	1/4" (6 mm)	30
SC-2-38	2" (51 mm)	3/8" (10 mm)	30
SC-2-50	2" (51 mm)	1/2" (13 mm)	30

10' (3 m) Lengths

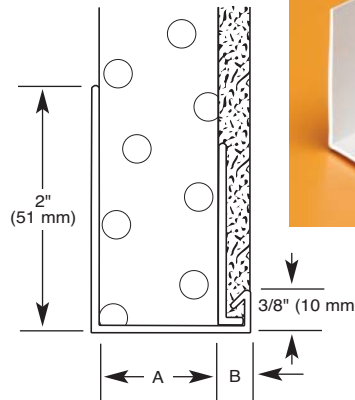

Add suffix "WP" to order with weep holes.
Example: SCWP-1-25

Window/Door Drip Edge

Product Number	Description	Dimension A	Pieces Per Box
SB-50	Window or door drip edge for 3/16" (5 mm) finishes	1/2" (13 mm)	100
SB-58		5/8" (16 mm)	100
SB-75		3/4" (19 mm)	100
SB-1		1" (25 mm)	75
SB-15		1-1/2" (38 mm)	60
SB-2		2" (51 mm)	50
SB-25		2-1/2" (64 mm)	30
SB-3		3" (76 mm)	30
SB-4		4" (102 mm)	25
SB-1-25X		For 1/4" (6 mm) finishes	

10' (3 m) Lengths




Also available in Tan and Gray, contact Customer Service at (800) 327-7077 for more information.

End Caps for SB Series



Product Number	Description/Dimensions		Sets Per Box
	Back Flange	Bottom Flange	
WDEC2-1	2" (51 mm)	1" (25 mm)	25
WDEC2-15	2" (51 mm)	1-1/2" (38 mm)	25
WDEC2-2	2" (51 mm)	2" (51 mm)	25

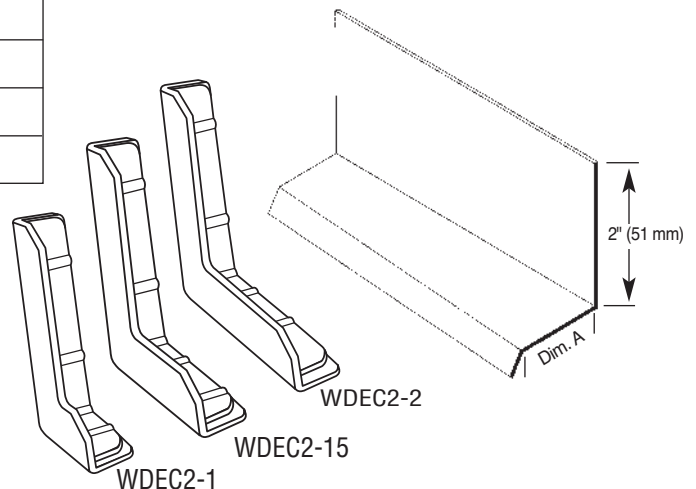

Patented



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com



Exterior Insulated Finishes

Section: 07240


EIFS "V" Control Joint

Product Number	Finish Thickness	Pieces Per Box
22027-16	1/16" (2 mm)	50
22027-25	1/4" (6 mm)	35
22027-38	3/8" (10 mm)	25

10' (3 m) Lengths

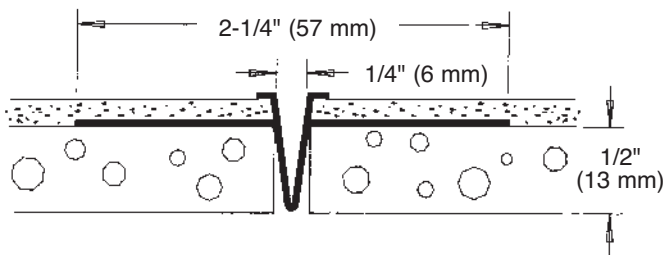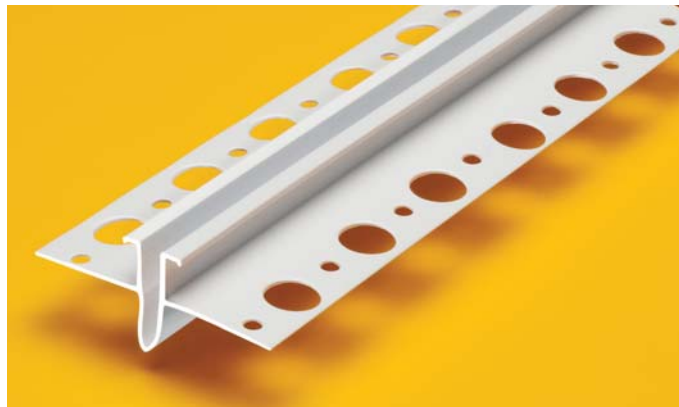

22027-25
22027-38

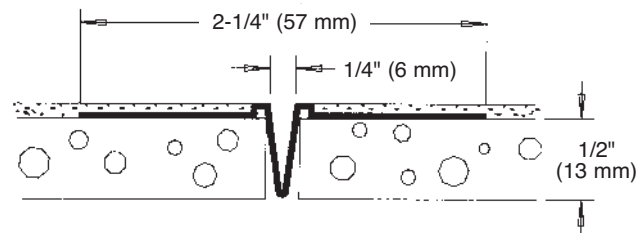


22027-16

EIFS "M" Control Joint

Product Number	Dimensions/Descriptions	Pieces Per Box
2138XS	Surface mounted expansion joint for 3/8" (10 mm) thick finish—has removable tape.	50

10' (3 m) Lengths

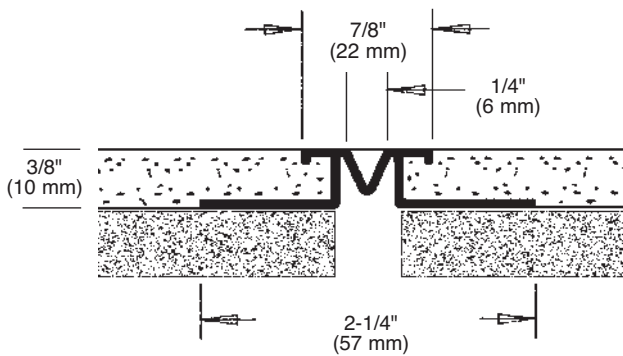

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Exterior Insulated Finishes




Section: 07240

EIFS Exterior Aesthetic Channel Reveal

Product Number	Dimension A	Dimension B	Pieces Per Box
2228	3/8" (10 mm)	1/2" min. (13 mm)	30
2225	1/2" (13 mm)		30
2229	5/8" (16 mm)		35
2227	3/4" (19 mm)		35
2226	1" (25 mm)		35
2235	1-1/2" (38 mm)	Large and small holes in hole pattern on flange.	30
2236	2" (51 mm)		30
2237	3" (76 mm)	No holes in flange.	20
2239	4" (102 mm)	No holes in flange.	20

10' (3 m) Lengths

Aesthetic F Reveal also available, please contact Customer Service at (800) 327-7077

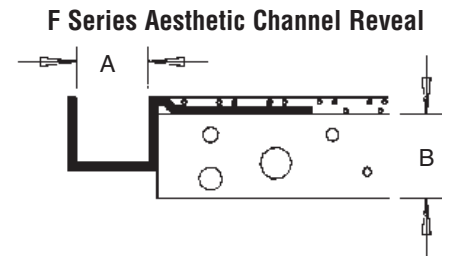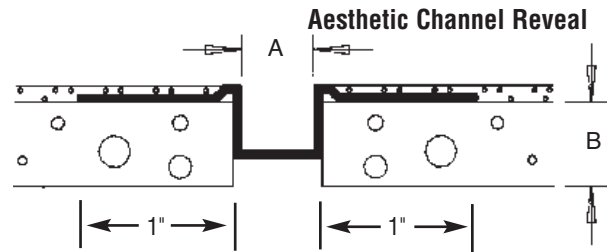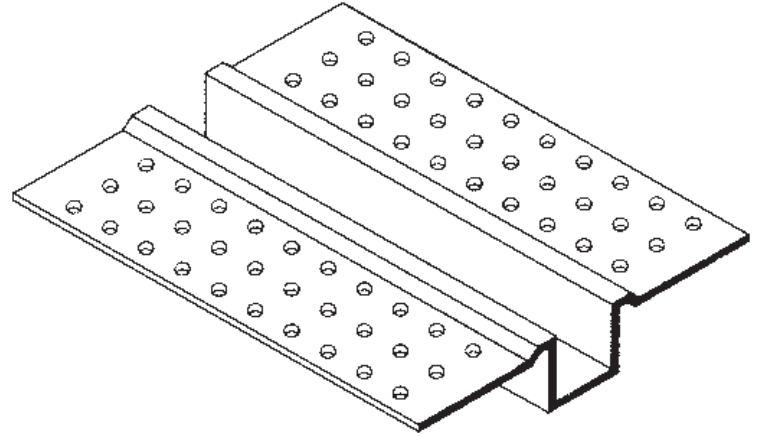

PLASTIC PCTM
COMPONENTS inc.

D-13

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

800.327.7077 · Fax 305.887.2452
www.plasticcomponents.com

Exterior Insulated Finishes







Section: 07240

EIFS Reveal Intersection

Product Number	Width	Depth	Pieces Per Box
2225	1/2" (13 mm)	1/2" (13 mm)	25
2226	1" (25 mm)	1/2" (13 mm)	25
2227	3/4" (19 mm)	1/2" (13 mm)	25
2228	3/8" (10 mm)	1/2" (13 mm)	25
2229	5/8" (16 mm)	1/2" (13 mm)	25
2235	1-1/2" (38 mm)	1/2" (13 mm)	25
2236	2" (51 mm)	1/2" (13 mm)	25
2237	3" (76 mm)	1/2" (13 mm)	25
2239	4" (102 mm)	1/2" (13 mm)	25

To order, add product suffix. Example: 2225C (for Cross), 2225T (for "T"), 2225A (for Angle), 2225EC (for End Closure), 2225OC (for Outside Corner) or 2225IC (for Inside Corner).

Contact our customer service department at **800.327.7077** for delivery information.

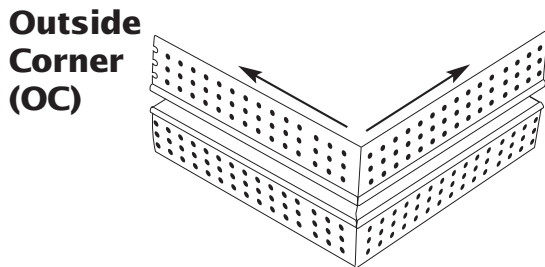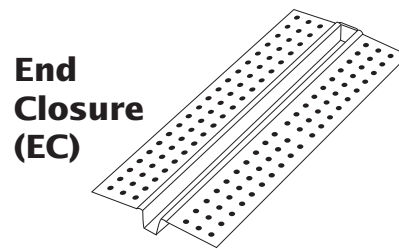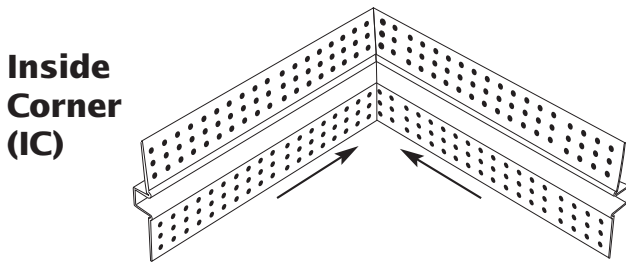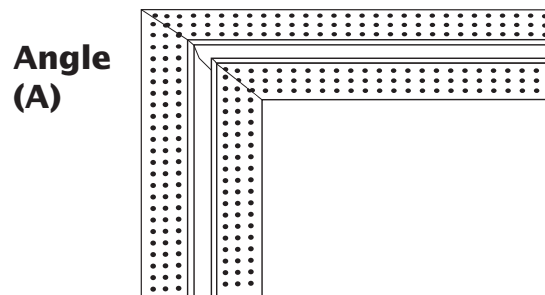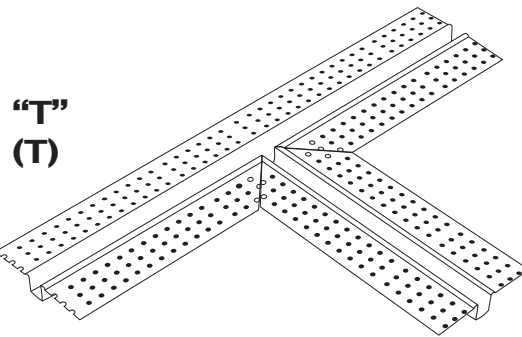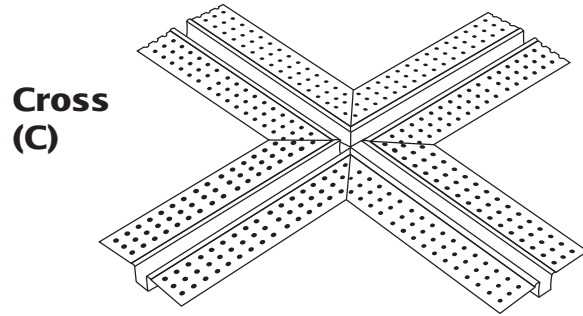

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Exterior Insulated Finishes


Section: 07240

Surface Mounted Vent 3", 4" and 6" wide vents

Product Number	Vent Area	Free Air Flow per linear ft.	Pieces Per Box
SMV3	3" (76 mm)	15 sq. inches (9,678 sq. mm)	35
SMV4	4" (102 mm)	16 sq. inches (10,323 sq. mm)	35
SMV6	6" (152 mm)	20 sq. inches (12,904 sq. mm)	30

10' (3 m) Lengths – Connector clips included


1/8" (3 mm) ground. For all applications except stucco.

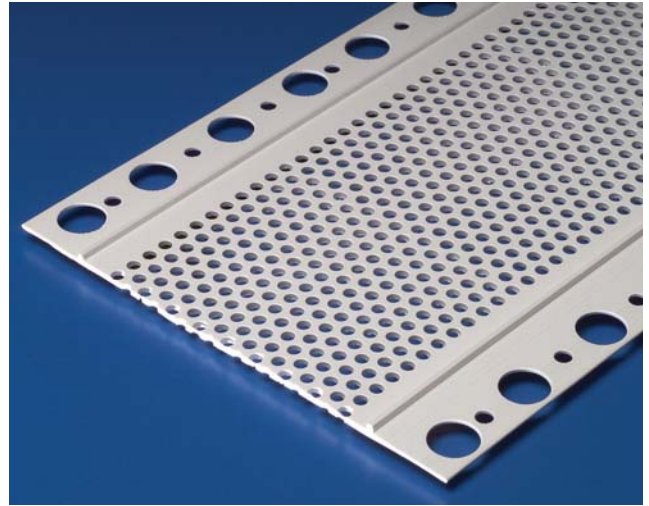

Continuous Soffit Vent

Product Number	For EIFS Applications on 1" and 1-1/2" EPS	Foam Thickness	Pieces Per Box
548-1	14 sq. inches free linear air flow (9,033 mm).	1" (25 mm)	10
548-15		1-1/2" (38 mm)	8

10' (3 m) Lengths – Connector clips included

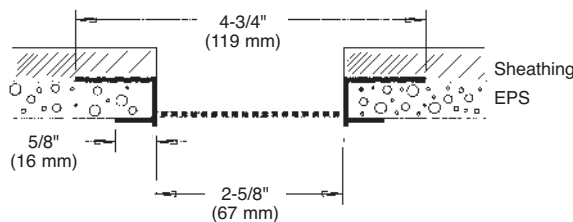

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.




Exterior Insulated Finishes

Section: 07240

2-Piece Soffit Vent 90° Leg

Product Number	Description/Dimensions	Board Thickness	Pieces Per Box
F548-1 WF551	2-5/8" (67 mm) wide vented area	1" (25 mm)	10
F548-15 WF551	2-5/8" (67 mm) wide vented area	1-1/2" (38 mm)	8


10' (3 m) Lengths • Connector clips included

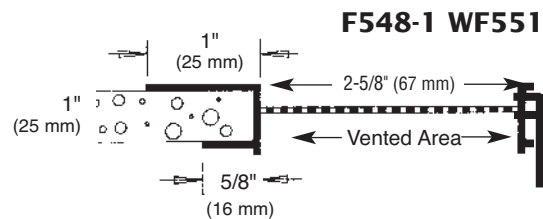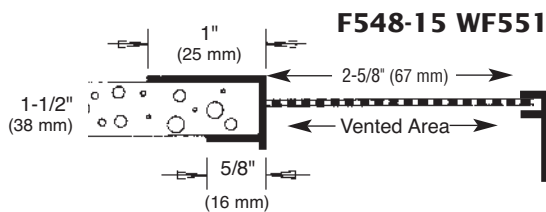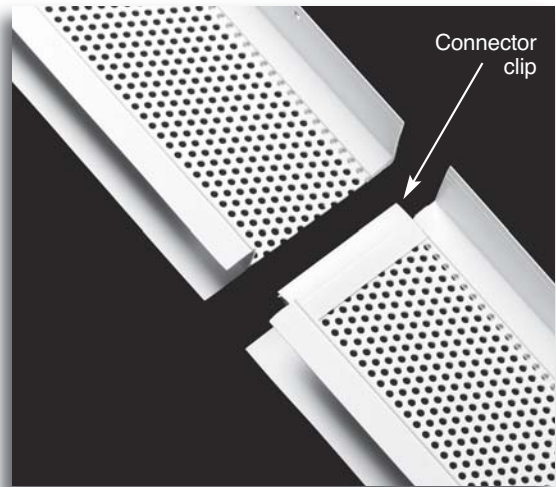

Sill Wedge

Product Number	Width	Dimensions/Descriptions	Pieces Per Box
SW-3-78	3" (76 mm)	Water management product designed to provide positive slope at window sill. Window frame sits on sloped sill wedge and directs moisture towards the face of the moisture barrier where it drains out of the bottom of the system.	30
SW-5-78	5" (127 mm)		30

10' (3 m) Lengths

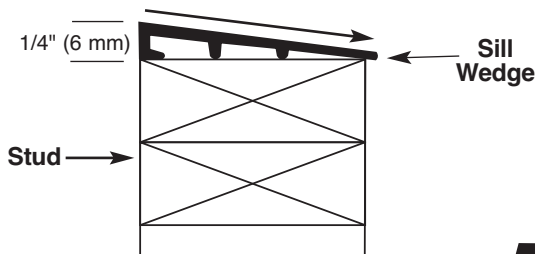

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



PLASTIC PCTM
COMPONENTS inc.



Exterior Insulated Finishes

Section: 07240

Angled Termination Bead

Product Number	Dimensions/Descriptions	Pieces Per Box
2221-45	45° angled bead. For use around any opening as a backing for sealant.	100

10' (3 m) Lengths

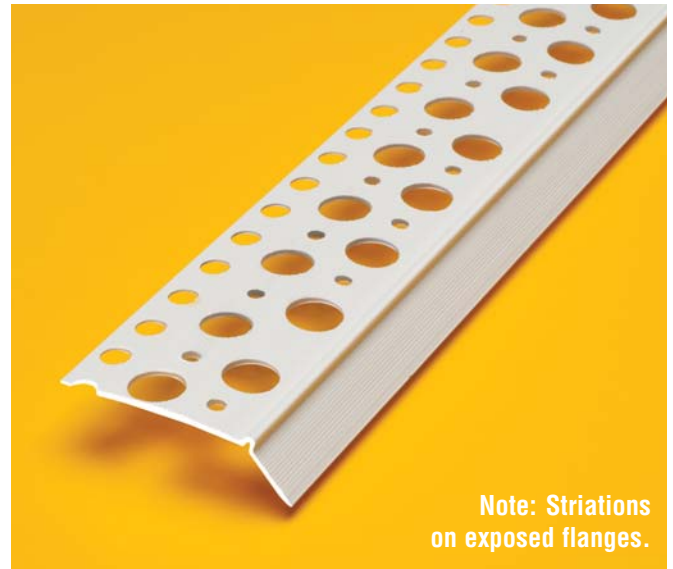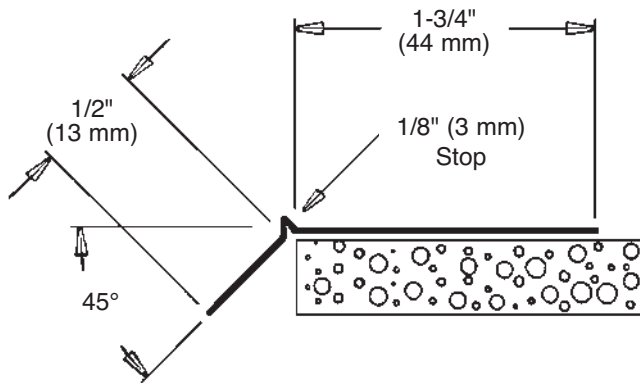

Note: Striations on exposed flanges.

Casing Bead

Product Number	Dimensions/Descriptions	Pieces Per Box
SX-187-16	Reinforced casing bead, 1-5/8" (41 mm) perforated flange 3/16" (5 mm) lip.	75

10' (3 m) Lengths




Exterior Insulated Finishes

Section: 07240

WDA Window/Door Arch Drip Edge

Product Number	Description	Dimension A	Pieces Per Box
WDA-75	3-1/2" (89 mm) wide flange head flashing for windows and doors.	3/4" (19 mm)	30
WDA-1		1" (25 mm)	30
WDA-1125		1-1/8" (29 mm)	30
WDA-15		1-1/2" (38 mm)	30
WDA-175		1-3/4" (45 mm)	30
WDA-2		2" (51 mm)	30
WDA-25		2-1/2" (64 mm)	30



10' (3 m) Lengths

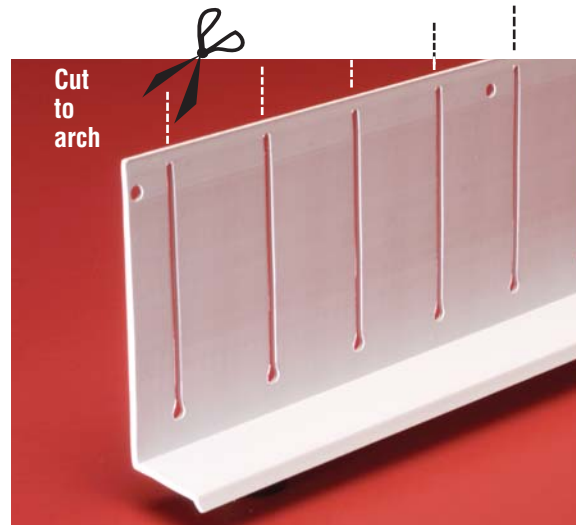

NEW!

End Caps for WDA Window/Door Arch Drip Edge

Product Number	Description/Dimensions		Sets Per Box
	Back Flange	Bottom Flange	
WDEC3-1	3" (76 mm)	1" (25 mm)	25
WDEC3-15	3" (76 mm)	1-1/2" (38 mm)	25
WDEC3-2	3" (76 mm)	2" (51 mm)	25

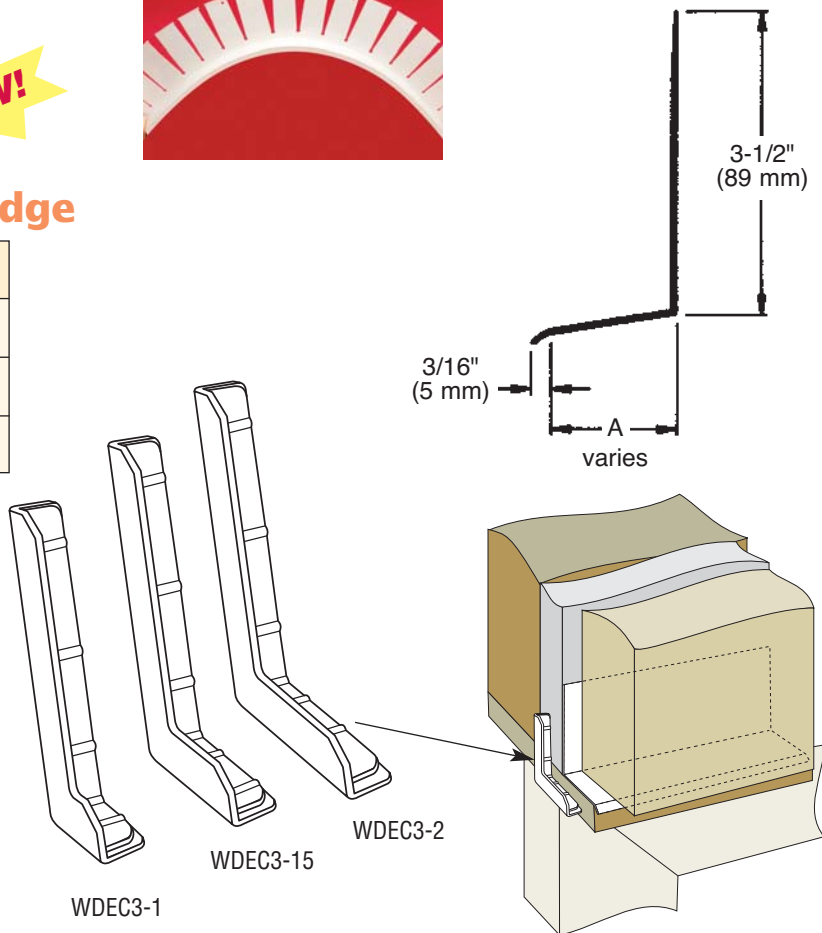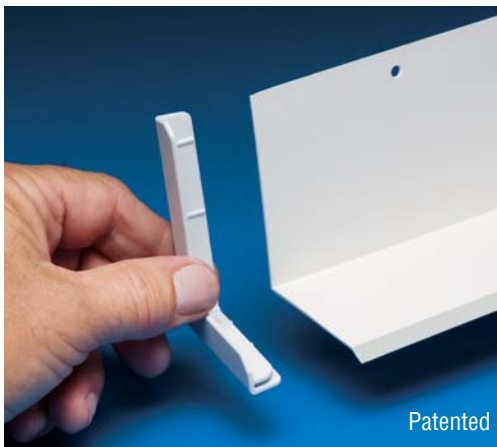

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.


Exterior Insulated Finishes

Section: 07240

Vent Screen TRAC

Product Number	Description	Foam Thickness	Pieces Per Box	
VST-50	TRAC for EIFS systems with double row of drainage holes at the rear of the TRAC. 2" (51 mm) wide nailing flange with nail attachment holes set at 4" (102 mm) o.c.	1/2" (13 mm)	35	
VST-58		5/8" (16 mm)	35	
VST-75		3/4" (19 mm)	30	
VST-1		1" (25 mm)	25	
VST-125		1-1/4" (31 mm)	20	
VST-15		1-1/2" (38 mm)	20	
VST-175		1-3/4" (44 mm)	15	
VST-2		1" (25 mm) return flange.	2" (51 mm)	15
VST-225		Available without weep holes. To order, add prefix "N". Example: NVST-50.	2-1/4" (57 mm)	15
VST-25		2-1/2" (64 mm)	15	
VST-275		2-3/4" (70 mm)	10	
VST-3		3" (76 mm)	10	

10' (3 m) Lengths

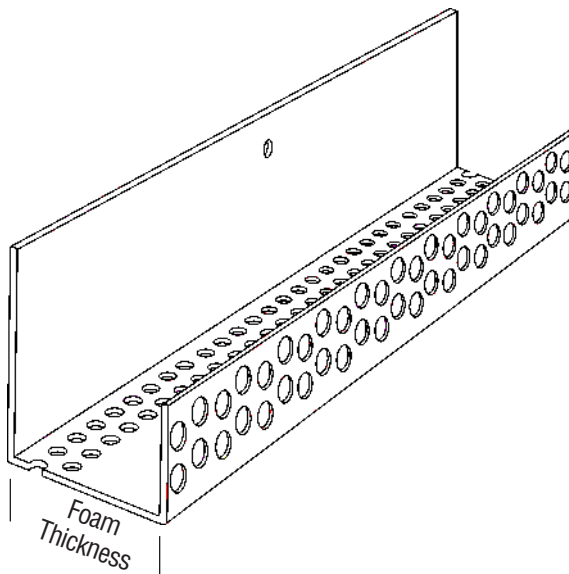

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.



Exterior Insulated Finishes

Section: 07240

Raised Bridge Joint

Product Number	Dimension/Description	Pieces Per Box
1609	An alternative to removing foam around window and installing backer rod and caulk.	50

10' (3 m) Lengths

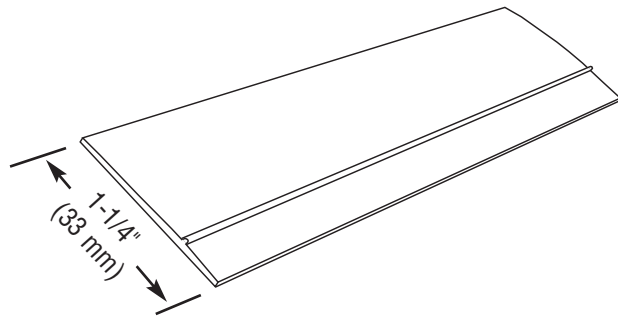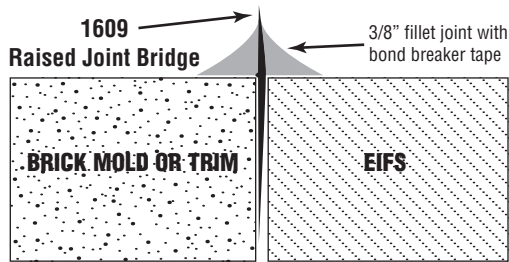

Break Reveal

Product Number	Dimensions/Description	Pieces Per Box
1552	Overall width 2-1/4" (57 mm) 1/4" reveal width by 1/8" ground (6 mm x 3 mm)	50
1553	Overall width 2-1/4" (57 mm) 1/2" reveal width by 1/8" ground (13 mm x 3 mm)	50
1554	Overall width 2-1/4" (57 mm) 3/4" reveal width by 1/8" ground (19 mm x 3 mm)	50
1556	Overall width 5-1/8" (130 mm) Wider flange break reveal used in the tilt wall market to cover joints. 3/8" reveal width by 1/8" ground (10 mm x 3 mm)	35

10' (3 m) Lengths



1556 Break Reveal
5-1/8" wide flange



The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

Exterior Insulated Finishes

Section: 07240

Low Profile, Recessed Electrical Box



PCDBVME1W
with fixed flange

Product Number	Dimensions/Description	Flange Style	Cover Color	Pcs Per Box
PCDBVME1C	IN BOX™ Electrical box for 1-1/2" (38 mm) EIFS and DEFS foam wall systems.	Fixed	Clear	4
PCDBVME1W		Fixed	White	4
PCDBVMA1C	For EIFS and DEFS foam wall systems up to 2" (51 mm) thick.	Adjustable	Clear	4
PCDBVMA1W		Adjustable	White	4

Patent pending - Arlington Industries, Inc.


Arlington Industries' IN BOX for EIFS and DEFS is now available from Plastic Components! These one-piece electrical boxes save labor time, and because IN BOX installs in the wall, you'll get a great-looking job too. The cover protrudes from the wall just enough to provide a neat, clean appearance.

PCDBVMA1W
with adjustable flange

Flange in position for thin foam or finish thickness



Flange opened for thicker foam board or finish

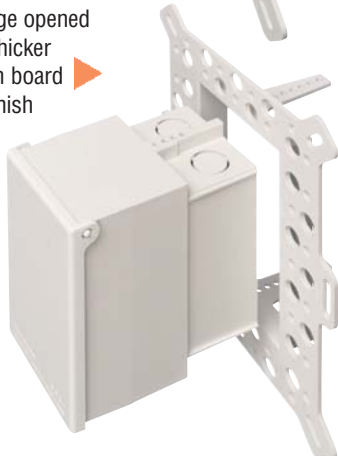

The **fixed-flashing style** IN BOX offers superior moisture control in 1-1/2" foam wall systems. It has a large, built-in flange that eliminates the need for a separate flashing.



For foam board up to 2" thick



For 1-1/2" thick foam board



The **adjustable flange style** adjusts to fit any foam board thickness or custom finish in concrete block and stucco applications.

For finishes 1/4" to 2-1/2" thick on walls 2-3/4" to 5" deep.



Shipped-in-place disposable mud cover

- Paintable white or clear cover
- UL/CSA Listed weatherproof while in use
- Meets NEC 2011 (National Electric Code)

The base coat mesh should be lapped over the top of the perforated flanges and across all butt joints.

